



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 0 491 537 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
20.11.1996 Bulletin 1996/47

(51) Int. Cl.⁶: **A61B 17/072**

(21) Application number: **91311655.4**

(22) Date of filing: **16.12.1991**

(54) **Improved stapler**
Verbessertes Klammergerät
Agrafeuse améliorée

(84) Designated Contracting States:
DE FR GB IT

(30) Priority: **18.12.1990 US 629142**

(43) Date of publication of application:
24.06.1992 Bulletin 1992/26

(60) Divisional application: **95111156.6**

(73) Proprietor: **United States Surgical Corporation**
Norwalk, Connecticut 06856 (US)

(72) Inventors:
• **Foslien, Floyd L.,**
c/o Minnesota Mining and
St. Paul, Minnesota 55133-3427 (US)

• **Plyley, Alan K.,**
c/o Minnesota Mining and
St. Paul, Minnesota 55133-3427 (US)

(74) Representative: **Kohlmann, Karl Friedrich, Dipl.-**
Ing. et al
Hoffmann, Eitle & Partner,
Patentanwälte,
Postfach 81 04 20
81904 München (DE)

(56) References cited:
EP-A- 0 332 413

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

BEST AVAILABLE COPY

EP 0 491 537 B1

Description

Technical Field

The present invention relates generally to surgical stapling instruments for applying parallel rows of staples through compressed living tissues.

Background

The art is replete with surgical stapling instruments used for applying parallel rows of staples through compressed living tissue. These types of stapling devices are used, for example, in transecting or reconnecting intestinal, gastric and lung tissue.

One known surgical stapling instrument of this type is well known and is currently available under the trade designation "The ILA Stapler", catalog #3957 by Minnesota Mining and Manufacturing Company, St. Paul, Minnesota. The use of the stapler is described in the publication entitled "Surgical Stapling, Gastric and Small Bowel Procedures, Volume I", ISBN 0-937433-00-4, Library of Congress Catalog Number 85-082599 available from Minnesota Mining and Manufacturing Company, St. Paul, Minnesota. The ILA Stapler and an improvement thereto is described in Redmond et al., U.S. Patent 4,863,088. That stapling instrument comprises first and second elongate structural members each comprising a handle part and a jaw part projecting from a first end of the handle part. The structural members have pivot means at second ends of their handle parts adapted for free engagement and disengagement in a plane normal to the directions in which the members are elongate, which pivot means afford, when engaged, relative pivotal movement of the structural members in the plane between a closed position with the jaw parts in closely spaced relationship, and an open position spaced farther from each other than in the closed position. An elongate locking member having a pivot point closely adjacent a first end is mounted at its pivot point on the first end of the second structural member for pivotal movement around an axis generally normal to the plane between a locking position generally aligned with the handle part of the second structural member, and a release position with a second end of the locking member spaced from the second end of the second structural member. The first end of the locking member and the handle part of the first structural member adjacent its first end have surfaces adapted, when the pivot means are engaged and the structural members are in their open position, for engagement during movement of the locking member from its release position to its locking position to forcefully move the structural members to their closed position so that high compressive forces can be applied on tissues to be stapled between the jaw parts of the structural members. The stapler also comprises means adapted for releasable engagement between the elongate locking member and the second structural member which releasably

hold the locking member in its locking position and thus maintain any compressive forces applied between the jaw parts. The stapling instrument is adapted to have a fixed or removable anvil positioned along one of the jaw parts, and a cartridge containing a plurality of staples disposed in rows positioned along the other of the jaw parts in opposition to the anvil, and the cartridge includes manually actuatable means for sequentially ejecting the staples from the cartridge to press the staples against the anvil to engage and close the staples in tissues between the jaw parts when the structural members are in their closed position. Additionally, if desired, the cartridge can include a knife that moves along and bridges between the cartridge and anvil to cut tissues between the rows of applied staples.

Existing "ILA" type staplers include a firing handle located on only one side of the surgical stapler handle along with a relatively large size jaw and a relatively small size jaw. These types of staplers and cartridge assemblies encounter problems when they are used in a medical procedure at a location in the patient's body where there is little room or clearance to maneuver or orient the surgical stapler. For example, in some procedures, the relatively small size jaw is placed through a slit-like incision in bowel tissue in order to be positioned adjacent to tissue to be stapled, and the larger jaw is placed through another slit-like incision in other bowel tissue. It is preferable to make these apertures as small as possible to minimize damage to the tissue. Existing staplers include a firing handle located only on one side of the surgical stapler and, since the position of the firing handle is dependent upon the location of the small jaw, the resulting position of the stapler is sometimes one in which access to the firing handle is restricted or even blocked by tissue (e.g. an organ). Thus, it is difficult for the surgeon to manually fire the stapler using the firing handle due to the obstructing tissue. Heretofore, attempts to solve this problem include using a long cylindrical rod placed against the firing handle to fire the stapler, but this is an undesirable solution as the use of such a rod for that purpose reduces the control the surgeon has over the firing of the stapler and creates a danger that the rod would slip off the firing handle and damage internal tissues.

Another problem associated with "ILA" type staplers is also encountered when the stapler is used in a surgical procedure at a cramped location where the surgeon's capacity to position the stapler is restricted due to the proximity of the stapler to sensitive tissue. Once the stapler has been oriented in the proper position, existing staplers use a lever locking member to clamp or approximate the tissue to be stapled between the stapler jaws prior to firing. Once the stapler is fired, existing lever locking members, such as the "ILA" stapler disclosed in U.S. Patent 4,863,088 to Redmond et al., release the locking member by means of a button located on only one side of the stapler. Again, access to the button may be restricted or difficult if the stapler is used at a location in close proximity to sensitive tissue.

U.S. Patent 4,633,874 to Chow et al. discloses a latching mechanism including a latch arm which is movable to a partially latched position in which the jaw members are loosely connected together to permit the staple cartridge and anvil to be adjusted in position on the tissue without disconnecting the jaw members from each other. U.S. Patent 4,520,817 to Green discloses a locking handle pivotable to cause camming surfaces to slide on lugs to thereby rotate frames toward each other about a pivot bar between open and closed positions. The prior art staplers disclosed in Chow et al. and Green disclose a locking mechanism generally referred to as an "over center" link and it is believed that such over center links are difficult to open when the stapler is used with thick tissue. Problems associated with opening the locking mechanism are only aggravated when the stapler is used at a cramped location.

EP-A-0332413 forms the preamble of the subject application independent claims 1 and 6, which solve the first mentioned problem, while independent claim 7 solves both problems.

Disclosure of the Invention

According to a first aspect of this invention there is provided a stapler firing assembly as claimed in claim 1 or 6 and according to a second aspect of this invention there is provided a stapler firing assembly in combination with a surgical stapler as claimed in claim 7 herein.

The present invention provides an improved firing handle assembly which affords firing of a stapler from either side or from both sides of the handle. The present invention may also be expressed as a combination of the improved firing handle assembly with an improved surgical stapler. These features create a stapler which is particularly suitable for convenient use in medical procedures in remote, cramped conditions.

Reference is made to our co-pending divisional application (our ref: M.7596) in which there is provided an improved surgical stapler which like the ILA stapler described above has first and second structural members each being elongate in a first direction. The first structural member has a handle part having first and second ends, the second structural member has a base portion having first and second ends, and each of the structural members having a jaw part projecting from its first ends. The jaw parts have proximal ends adjacent the first end of the handle part of the first structural member and the first end of the base portion of the second structural member, and each of the jaw parts have distal ends remote from the proximal ends.

The structural members have pivot means at their second ends adapted for free engagement and disengagement in a plane normal to the first direction for affording, when engaged, relative pivotal movement of the structural members in the plane between a closed position with the jaw parts in closely spaced relationship, and an open position with the jaw parts spaced farther from each other than in the closed position. In the

closed position, the handle part of the first structural member and the base portion of the second structural member define a space between the structural members over the majority of the distance between the first and second ends. An elongate locking member is present which has first and second ends and a pivot point closely adjacent the first end of the locking member. The pivot point of the locking member is mounted on the second structural member adjacent the first end of the second structural member for pivotal movement around an axis generally normal to the first direction between a locking position generally aligned with the base portion of the second structural member, and a release position with the second end of the locking member spaced from the second end of the second structural member. The first end of the locking member and the handle part of the first structural member adjacent the first end of the first structural member have surfaces adapted, when the pivot means are engaged with the structural members in the open position, for engagement during movement of the locking member from the release position to the locking position to forcefully move the structural members to the closed position. There is also provided means for releasable engagement between the elongate locking member and the second structural member for holding the locking member in the locking position.

Unlike the ILA stapler described above, however, the means for releasable engagement between the elongate locking member and the second structural member for holding the locking member in the locking position comprises a dual-sided lever lock release. The dual-sided lever lock release comprises surfaces in the second structural member defining a slot generally adjacent the second end of the second structural member, and a lever lock having a retaining surface adapted to engage the surfaces defining the slot of the second structural member to retain the elongate locking member in the locking position. The lever lock is adapted to move between an unlatched position to afford movement of the elongate locking member to the release position and a latched position to retain the elongate locking member in the locking position. The dual-sided lever lock release includes a pair of release arms actuable from either side of the lever cover for independently moving the lever lock from the latched position to the unlatched position so that a surgeon may release the locking member in cramped conditions.

Also, like the ILA stapler described above, in the surgical stapler of our divisional co-pending application, the first structural member is adapted to receive the staple cartridge assembly and the jaw part of the second structural member is adapted to receive an anvil surface. The staple cartridge assembly comprises a cartridge body for enclosing a plurality of staples disposed in rows oriented longitudinally of the jaw part in opposition to the anvil when the structural members are in their closed position. Also, the cartridge assembly includes manually actuatable means including cam-like drivers

or pushers adapted to be moved through longitudinal slots in the cartridge body by manually pressing on a firing handle assembly. The pushers sequentially press the plurality of staples within the cartridge body against the anvil to engage and close the plurality of staples in tissues between the jaw parts when the structural members are in the closed position. The pushers are movable in the first direction between a retracted position with the plurality of staples enclosed within the cartridge body and an extended position with the plurality of staples closed within tissue. The firing handle assembly is located within the space between the structural members and includes a firing body adapted to be manually engaged to afford movement of the pushers between the retracted and the extended positions.

Unlike the previously described ILA stapler, however, in the improved staple cartridge for use in the stapler according to the present invention, the firing body in the firing handle assembly used to manually fire the surgical stapler is elongate and has a longitudinal axis transverse to a direction of elongation of the structural members and is mounted on a firing handle adapter which has surfaces adapted for connecting the firing body to the pushers and also mounts the firing body for releasable lateral movement between at least two firing positions to afford actuation of the pushers from either side of the stapler. Detent surfaces are provided for releasably securing the firing body in a first position located generally on one side of the stapler, a second position generally located on the other side of the stapler and a middle position located on both sides of the stapler. Thus, a surgeon may access the firing body from either side of the stapler which is particularly useful when the stapler is used in cramped conditions.

Brief Description of the Drawing

The present invention will be further described with reference to the accompanying drawing wherein like reference numerals refer to like parts in the several views, and wherein:

Figure 1 is a perspective view of a surgical stapling instrument and a cartridge assembly using the present invention showing first and second assemblies of the stapling instrument in a closed position; Figure 2 is a side view of the surgical stapling instrument of Figure 1;

Figure 3 is a side view of the surgical stapling instrument of Figure 1 showing the first and second assemblies of the stapling instrument in an open position;

Figure 4 is an enlarged sectional view of the stapler and cartridge assembly of Figure 1 taken approximately along lines 4-4 of Figure 2;

Figure 5 is an enlarged partial sectional view of a first assembly of the stapler and the cartridge assembly of Figure 1 taken approximately along line 5-5 of Figure 4 and illustrating the position of

the firing body in a first position with solid lines and a middle position with broken lines;

Figure 6 is an enlarged sectional view of the stapler assembly and the cartridge assembly of Figure 1 which is similar to Figure 5 but which illustrate the position of the firing body in a second position;

Figure 7 is a top view of the surgical stapling instrument of Figure 1;

Figure 8 is enlarged fragmentary sectional view of the surgical stapling instrument of Figure 1 taken approximately along line 8-8 of Figure 2 and illustrating a lever lock in a latched position;

Figure 9 is an enlarged fragmentary sectional view of the surgical stapling instrument and cartridge assembly of Figure 1 which is similar to Figure 8 except that Figure 9 illustrates the lever lock in an unlatched position; and

Figure 10 is an enlarged fragmentary sectional view of the surgical stapling instrument and the cartridge assembly of Figure 1 taken along line 10-10 of Figure 7 and illustrating the lever lock in a latched position and having portions broken away to show detail.

Detailed Description

Referring now to the drawing, there is shown a surgical stapling instrument 10 and a cartridge assembly 2 using the present invention, generally designated by the reference numerals 2 and 10, respectively.

The surgical stapler 10 comprises two separable assemblies 11 and 13 comprising first and second elongate structural members 12, 14. The first and second elongate structural members 12, 14 have first and second sides 19, 21 with the first structural member 12 comprising a handle part 16 and a jaw part 20 projecting from a first end 7 of the handle part 16, and with the second structural member 14 including a base portion 8 and a jaw part 22 projecting from a first end 3 of the base portion 8. A tissue stop surface 31 is attached to the second structural member 14 generally adjacent its first end 3 and is adapted to abut tissue. The tissue stop surface 31 provides means for locating and aligning the stapler jaw parts 20, 22 with respect to the tissue to be stapled.

The structural members 12, 14 have pivot means at second ends 5, 9 of the handle part 16 and the base portion 8 comprising two opposite axially parallel outwardly projecting pins 25 on the second structural member 14 and generally U-shaped journal surfaces 26 on the first structural member 12 adapted and positioned for free engagement and disengagement in a plane normal to the directions in which the structural members 12 and 14 are elongate, which pivot means affords, when engaged, relative pivotal movement of the structural members 12, 14 in the plane normal to the directions in which the structural members 12 and 14 are elongate between a closed position (Figures 1 and 2) with the jaw parts 20, 22 in closely spaced relationship, and an open

position (Figure 3) with the jaw parts 20, 22 spaced farther from each other than in the closed position. An elongate locking member 28 having a pivot point at a position closely adjacent a first end 4 of the locking member 28 is mounted by a pin 29 on the first end 3 of the second structural member 14 for pivotal movement around an axis generally normal to the plane between a locking position (Figures 1 and 2) generally aligned with the base portion 8 of the second structural member 14, and a release position (Figure 3) with the second end 6 of the locking member 28 spaced from the second end 5 of the second structural member 14. The elongate locking member 28 includes a handle part 18 and a lever cover 328 is attached to the handle part 18. A lever stop 34 is attached to the second structural member 14 to prevent the locking member 28 from pivoting forward from the open position and pinching tissue.

The first end 4 of the locking member 28 and the first end 7 of the first structural member 12 have surfaces provided by two opposite axially parallel inwardly projecting pins 30 on the handle part 18 and side surfaces of generally U-shaped journal surfaces 32 on the first structural member 12 opening toward the second end 9 of the first structural member 12, adapted, when the pivot means are engaged with the structural members 12, 14 in the open position, for engagement during movement of the locking member 28 from its release position (Figure 3) to its locking position (Figure 2) to forcefully move the structural members 12, 14 to their closed position so that high compressive forces can be applied to tissues between the jaw parts 20, 22 of the structural members 12, 14.

A handle cover 15 is attached to the handle part 16 of the first structural member 12. A handle cover 328 is attached to the handle part 18 of the locking member 28 and is similar in shape to the handle cover 15. The handle cover 328 and the handle cover 15 have manually engageable projections 23 having engagement surfaces 24 disposed generally at an included angle of less than ninety degrees with respect to the direction of elongation of the jaw parts 20, 22, preferably eighty-five degrees. The engagement surfaces 24 of the handle cover 328 and the handle cover 15 are adapted to be engaged with the fingers of a user's hand while the thumb of that hand is used to operate an adjustable firing body 50. The angle between the jaw parts 20, 22 and the engagement surfaces 24 is less than ninety degrees to provide grasping means for the user's fingers to provide an incline to prevent the user's fingers from slipping or sliding from the handle covers 15, 328. The handle covers 15, 328 may be constructed from any suitable material such as, but not limited to, polycarbonate or ABS plastic.

A novel structure of the stapling instrument 10 that distinguishes the stapling instrument from known stapling instruments is means for releasable engagement between the elongate locking member 28 and the second structural member 14 generally designated by the reference number 80 which affords release of the lock-

ing member 28 from either side 19, 21 of the stapler 10. As shown in Figures 7-10, that dual-sided lever lock release assembly 80 comprises surfaces defining a slot 83 in the second structural member 14 adjacent the second end 5 of the second structural member 14 (Figure 9), and a lever lock 84 having a generally rectangular planar base portion 82 having a longitudinal axis. The base portion 82 is located within a chamber 81, between the handle part 18 and the lever cover 328, and a hook portion 86 is connected to the base portion 82 by being integral therewith. The hook portion 86 projects generally normally from the base portion 82 and has a retaining surface 87 adapted to engage a surface adjacent one end of the slot 83 of the second structural member 14 to retain the elongate locking member 28 in the locking position (Figure 10). The lever lock 84 is adapted to move axially between an unlatched position (Figure 9) to afford movement of the elongate locking member 28 to the release position (Figure 3) and a latched position (Figures 8 and 10) to which the lever lock 84 is biased by a spring 96 to retain the elongate locking member 28 in the locking position (Figure 2). The handle part 18 of the elongate locking member 28 has surfaces defining an aperture 88 communicating with the chamber 81 and located generally adjacent the second end 6 of the elongate locking member 28 which affords passage of the hook portion 86.

The dual-sided lever lock release 80 is located on first and second sides 19', 21' of the elongate locking member 28 and comprises first 92 and second 94 release arms each having first and second ends 35, 36, and first and second opposite side surfaces 37, 38. The second ends 36 of the release arms 92, 94 include camming surfaces 93, 95; and the first ends 35 of the release arms 92, 94 are pivotally attached to the handle part 18 of the elongate locking member 28 by a pin 98 to afford movement between an engaged position (Figure 9) with camming surface 93 or 95 in engagement with the lever lock 84 to unlatch the lever lock 84 and a disengaged position (Figure 8) with the camming surface 93 or 95 disengaged or spaced from the lever lock 84. Preferably the release arms 92, 94 are constructed to remain slightly engaged with the lever lock 84 when they are in the disengaged position to prevent the camming surfaces 93 or 95 from sliding out of contact with the lever lock 84.

The lever lock 84 includes a shoulder surface 85 adjacent the hook portion 86 for receiving the camming surfaces 93, 95 when either of the release arms 92 or 94 are moved to the engaged position (Figure 9). The release arms 92, 94 move independently of each other and thus, although Figure 9 shows both release arms 92, 94 moved to the engaged position, the user need only actuate one of the release arms 92 or 94 to release or unlatch the lever lock 84 from the second structural member 14. This feature affords independent release of the elongate locking member 28 from either of its sides 19', 21' and provides an alternative release means when using the stapler in a cramped area.

First and second release buttons 97, 99 are mounted on the release arms 92, 94 adjacent the sides 19', 21' of the elongate locking member 28 for movement between first (Figure 8) and second (Figure 9) positions with respect to the locking member 28. The first button 97 is mounted to the second release arm 92 along its first side 38 and the second button 99 is connected to the first release arm 94 along its second side 37 so that movement of either of the buttons 97, 99 from the first to the second positions relative to the locking member 28 will pivotally move the associated release arm 92 or 94 from the disengaged to the engaged position and thus drives the lever lock 84 from the latched position to the unlatched position.

The dual-sided lever lock release assembly 80 includes biasing means for biasing the lever lock 84 axially toward the latched position in the form of a coil spring 96 connected to handle part 18 of the elongate locking member 28 and to one end of the base portion 82 of the lever lock 84. The coil spring 96 is placed in tension to bias the lever lock 84 toward the latched position. The biasing means may comprise any suitable means including but not limited to a leaf spring, a coil spring, an extension spring, a compression spring or a torsion spring.

The hook portion 86 comprises camming surface 89 adapted to engage the surfaces defining the slot 83 of the second structural member 14 when the elongate locking member 28 is moved from the release to the locking positions. The camming surface 89 moves the lever lock 84 from the latched position to the unlatched position against the bias of the coil spring 96 to afford passage of the hook portion 86 from one side of the slot 83 in the second structural member 14 to the other to thereby afford engagement between the retaining surface 87 of the hook portion 86 and the surfaces of the second structural member 14 surrounding the slot 83 when the elongate locking member 28 is moved from the release position (Figure 3) to the locking position (Figure 2). The coil spring 96 biases the lever lock 84 axially toward the latched position and thus causes a tactile "click" when the lever lock 84 slides to the latched position and the retaining surface 87 engages the surfaces surrounding the slot 83.

The second structural member 14 is adapted to have an elongate fixed or removable anvil 40 positioned over and along the jaw part 22 to form the first assembly 11, and the jaw part 20 of the first structural member 12 has an elongate channel or groove 39 adapted to receive a cartridge body 41 of the improved cartridge assembly 2 according to the present invention to form the second assembly 13. Alternatively, the cartridge body 41 may be integral with the first structural member 12.

The cartridge body 41 contains a plurality of staples 43 disposed in rows oriented longitudinally of the jaw part 20 in opposition to the anvil 40 when the structural members 12, 14 are in their closed position. The feature of the present invention which distinguishes the stapler

firing assembly from existing firing assemblies includes an adjustable handle assembly, generally designated by the reference number 50. The cartridge assembly 2 includes manually actuatable means including cam-like drivers or pushers 45 having first 44 and second 44A longitudinally spaced end portions. The pushers 45 are adapted to move longitudinally along the first jaw part 20 with the second end portion 44A sequentially pressing the staples 43 against the anvil 40 to engage and close the staples 43 in tissues between the jaw parts 20, 22 with the first end portion 44 moving between the handle part 16 and the base portion 8. The pushers 45 are adapted to be moved through longitudinal slots in the cartridge body 41 by manually pressing on the adjustable firing handle assembly 50.

The adjustable firing handle assembly 50 is connected to the first end portions 44 of the pushers 45. When the adjustable firing handle assembly 50 is manually pressed to move the firing body 52 from the pre-fired position (Figure 2) to the fired position, the drivers or pushers 45 sequentially eject the staples 43 from the cartridge body 41 by means of camming plungers 47 under the staples 43. The camming plungers 47 push the staples 43 toward a surface of the cartridge body 41 opposite the anvil 40 and thereby press the ejected staples 43 against specially shaped surfaces on the anvil 40 to engage and close the staples 43 in tissues between the jaw parts 20, 22 when the structural members 12, 14 are in their closed position. The cartridge assembly 42 can also optionally include a knife (not shown) that is also connected to the firing body 52 adjacent the pushers or drivers 45 so that manual movement of the pushers or drivers 45 to eject and close the staples 43 also moves the knife along the jaw parts 20, 22 with the distal end of the knife in a slot (not shown) in the anvil 40 to cut tissues between parallel, spaced rows of applied staples 43.

The adjustable firing handle assembly 50 comprises the elongate firing body 52 within a space between the handle part 16 of the first structural member 12 and the base portion 8 of the second structural member 14 for moving the pushers 45 from the retracted (Figures 2) to the extended positions. The elongate firing body 52 has a longitudinal axis L (Figure 6) transverse to the direction in which the structural members 12, 14 are elongate. The firing body 52 has opposite first 53 and second 55 end portions. A firing handle adapter 58 is attached to the first end portions 44 of the pushers 45 and is adapted to connect the elongate firing body 52 to the pushers 45.

A means 60 is provided which mounts the elongate firing body 52 to the firing handle adapter 58 for releasable, reciprocating lateral movement of the elongate firing body 52 along the longitudinal axis L in the form of a rod 61 extending between end portions 53 and 55 and located within an opening 69 in the firing handle adapter 58. A detent means 62 is also provided which releasably secures the elongate firing body 52 in a first position (Figure 6) with the first end portion 53 of the elongate fir-

ing body 52 generally adjacent a first side 19 of the structural members 12, 14 and a second position (Figure 5, solid lines) with the second end portion 55 of the elongate firing body 52 generally adjacent a second side 21 of the structural members 12, 14.

The structural members 12, 14 have an axis A (Figures 5 and 6) extending generally in the first direction along a middle portion of the stapler 10. The detent means 62 also releasably positions the firing body 52 at a middle position (Figure 5, dashed lines) midway between the first and second positions at which parts of the first and second portions 53 and 55 of the firing body 52 project beyond both the first and second sides 19, 21. When the elongate firing body 52 is placed in the middle position, the end portions 53 and 55 are located laterally beyond the sides 19', 21' of the elongate locking member 28 and provide surfaces on both sides of the stapler 10 for manually pressing on the elongate firing body 52.

Rectangular side walls 56 are included in the elongate firing body 52 and cooperate with the first and second end portions 53, 55 to form a rectangular box-shape 64 open along the side walls 56 into a cavity 59. The elongate firing body 52 has inside 65 and outside 67 surfaces, and the detent means 62 include a detent surface 68 which extend beyond the inside surface 65 of one of the rectangular side walls 56. It should be noted that the firing body 52 may comprise any suitable shape including, but not limited to square, triangular, arcuate and combinations of those shapes.

The firing handle adapter 58 has a neck portion 70 having first 72 and second 74 opposite generally planar flank walls, and surfaces which define a notch 76 adapted to receive the detent surface 68 of the elongate firing body 52. As shown in Figure 4, the neck portion 70 is adapted to extend into the cavity 59 of the firing body 52.

The first and second opposite planar flank walls 72, 74 are releasably secured between the detent surface 68 and the inner surface 65 of the second end portion 55 of the elongate firing body 52 when the elongate firing handle body 52 is in the first position, and the first and second opposite planar flank walls 72, 74 are releasably secured between the detent surface 68 and the inner surface 65 of the first end portion 53 of the elongate firing body 52 when the elongate firing handle body 52 is in the second position.

The means 60 mounting the elongate firing handle body 52 to the firing handle adapter for reciprocating manual movement of the firing body 52 along its longitudinal axis L comprises the cylindrical pin or rod 61 attached at its ends to the end portions 53, 55 of the firing body 52, and the neck portion 70 of the adapter 58 having surfaces defining an opening 69 adapted to receive the cylindrical pin 61.

In the middle position (Figure 5, dashed lines), the detent means 62 mounts the firing body 52 to the firing handle adapter 58 with the detent surface 68 engaged with the notch 76 of the neck portion 70 and with the first

53 and second 55 end portions of the firing body 52 generally equidistant from the axis A of the stapler 10. As shown in Figure 5, in the middle position, parts of the first and second end portions 53, 55 project beyond both the first and second sides 19, 21 of the structural members 12, 14.

The side wall 56 of the firing body 52 proximate the user includes flared edges 57 near the end portions 53, 55. The flared edges 57 provide means for grasping the firing body 52 with, for example, the user's thumbs and are flared outward to deter the user's thumbs from sliding laterally off the firing body 52. The flared edges 57 also deter the detent surface 68 from disengaging the notch 76 when the firing body 52 is in the middle position as manual pressure on the firing handle body 52 only increases the engagement between the notch 76 and the detent surface 68. The side wall proximate the user also includes a plurality of ribs 66 which assist the flared edges 57 in retaining the user's digit on the firing body 52 by providing additional friction surfaces.

During use of the stapler 10, the engagement surfaces 24 of the handle cover 328 and the handle cover 15 may be engaged by the fingers of a user's hands while the user's thumb is used to operate the adjustable firing body 52. The user may use only one hand to operate the firing body 52 when the firing body 52 is in the first or second positions. Such a feature is desirable for user's who prefer to exclusively use either their right or left hand when firing the stapler. When the firing body 52 is in the middle position, however, both of the user's thumbs may be used to operate the projecting parts of the firing body 52 to afford symmetrical manual pressing on the firing body 52 about the axis A of the first and second structural members 12, 14. Affording a user the capacity to symmetrically press on the firing body 52 from both sides of the axis A of the first and second structural members 12, 14 assists the user in controlling the position and stability of the stapler 10 and provides more effective firing of the stapler 10 when it is used, for example, in procedures which require a relatively large force to move the firing body 52 from the pre-fired to the fired position.

The present invention has now been described with reference to several embodiments thereof. It will be apparent to those skilled in the art that many changes or additions can be made in the embodiments described without departing from the scope of the present invention as defined in the claims. For example, the elongate firing handle body 52 may include a close friction fit with the firing handle adapter 58 thereby replacing the detent 68. Also, the elongate firing handle body 52 need not reciprocate or shuttle between the sides of the stapler 10 and may instead comprise only a single, fixed body which extends on both sides 19, 21 of the stapler 10. Also, the firing handle body may comprise a pivotal cantilever member which is pivotal between the sides of the stapler 10 in order to provide means for firing the stapler from either side 19 or 21.

Claims

1. A stapler firing assembly adapted for use in a surgical stapler comprising first and second handle parts having first (19) and second (21) sides, and first and second jaw parts (20 and 22), an anvil (40) positioned along the second jaw part (22), and a plurality of staples (43) positioned along the first jaw part (20) in opposition to the anvil (40), said firing assembly comprising:

a pusher (45) having a longitudinal axis and first and second longitudinally spaced end portions, said pusher being adapted to move longitudinally along the first jaw part (20) with said second end portion sequentially pressing the staples (43) against the anvil (40) to engage and close the staples (43) in tissues between the jaw parts with said first end portion moving between said handle parts,

a firing handle body (52) having opposite end portions (53 and 55); characterised by means mounting said handle body (52) on the first end portion of said pusher (45) for movement relative to said pusher between a first position at which one of said end portions (53 or 55) projects from the first side (19) of said handle parts, and a second position at which one of said end portions (53 or 55) projects from the second side (21) of said handle parts so that the firing handle body (52) can be positioned to be manually engaged on either side of the handle parts to move the second end of the pusher (45) along the first jaw to eject and close the staples.

2. A stapler firing assembly according to claim 1 wherein said firing handle body has first (53) and second (55) end portions, and

said means mounting said handle body (52) on the first end portion of said pusher mounts said handle body (53) for slidable, lateral movement relative to said pusher (45) between said first position at which said first end portion (53) of said handle body (52) projects from the first side (19) of said handle parts and said second position at which said second end portion (55) of said handle body projects from the second side (21) of said handle parts.

3. A stapler firing assembly according to claim 2 wherein said handle body and said means mounting said handle body on the first end portion of said pusher include detent means (62) for releasably retaining said handle body (52) in said first and second positions.

4. A stapler firing assembly according to claim 3 wherein said detent means (62) further includes means for releasably positioning said handle body (52) at a middle position midway between said first and second positions at which parts of said first (53) and second (55) end portions of said handle body (52) project beyond both the first (19) and second (21) sides of said handle parts.

5. A stapler firing assembly according to claim 1 wherein said firing handle body includes means (56 or 57) for preventing a user's digits from sliding laterally off the firing handle body (52).

6. A stapler firing assembly adapted for use in a surgical stapler comprising first and second handle parts having first (19) and second (21) sides, and first and second jaw parts (20, 22), an anvil (40) positioned along the second jaw part (22), and a plurality of staples (43) positioned along the first jaw part (20) in opposition to the anvil (40), said firing assembly comprising:

a pusher (45) having a longitudinal axis and first and second longitudinally spaced end portions, said pusher (45) being adapted to move longitudinally along the first jaw part (20) with said second end portion sequentially pressing the staples (43) against the anvil (40) to engage and close the staples in tissues between the jaw parts (20, 22) with said first end portion moving between said handle parts

a firing handle body (52) having opposite end portions (53 and 55); characterised by means (60, 62) mounting said handle body on the first end portion of said pusher for positioning said handle body on either side (19, 21) of said handle parts so that the firing handle body (52) can be positioned to be manually engaged on either side (19, 21) of the handle parts to move the second end of the pusher along the first jaw (20) to eject and close the staples.

7. In combination, a stapler firing assembly and a surgical stapler (10) having:

first (12) and second (14) structural members each being elongate in a first direction, the first structural member (12) having a handle part (16) including first (7) and second ends and the second structural member (14) having a base part (8) having first and second ends, and each of the first and second structural members having a jaw part (20, 22) projecting from said first ends, said first and second structural members (12, 14) having first (19) and second (21) sides, an anvil (40) positioned along the second jaw part (22), and a plurality of staples (43) posi-

tioned along the first jaw part (20) in opposition to the anvil (40), said structural members (12, 14) having pivot means at said second ends adapted for free engagement and disengagement in a plane normal to said first direction for affording, when engaged, relative pivotal movement of said structural members (12, 14) in said plane between a closed position with said jaw parts in closely spaced relationship, and an open position with said jaw parts spaced farther from each other than in said closed position;

an elongate locking member (28) having first and second ends, first and second sides, inner and outer surfaces extending between said sides and a pivot point closely adjacent the first end of the locking member (28), the pivot point of said locking member being mounted on said second structural member (28) adjacent the first end of said second structural member (28) for pivotal movement around an axis generally normal to said first direction between a locking position generally aligned with the base part (8) of said second structural member (14) with said inner surface adjacent said second structural member (14), and a release position with the second end (6) of said locking member (28) spaced from the second end (5) of said second structural member (14), said first end of said locking member (28) and said handle part of said first structural member (12) adjacent the first end of said first structural member (12) having surfaces adapted, when said pivot means are engaged with said structural members in said open position, for engagement during movement of said locking member from said release position to said locking position to forcefully move said structural members (12, 14) to said closed position; and means for releasable engagement between the elongate locking member (28) and the second structural member (14) comprising:

said second structural member having a slot (83) extending between said inner and outer surfaces generally adjacent the second end of said second structural member (14), a lever lock (84) including a hook portion (86) adapted to pass through said slot (83) in said second structural member (14) and having a retaining surface (87) adapted to engage a portion of said inner surface, means for mounting the lever lock (84) on said locking member (28) for movement between an unlatched position with said hook portion (86) aligned to pass through said slot (83) and to afford movement of the locking member (28) between said latched and release positions and an latched position with said hook portion (86) aligned to position the retaining surface

along a portion of said inner surface to retain the elongate locking member in the locking position,

first and second release buttons (97 and 99); and

actuating means mounting said first and second release buttons on opposite sides of said locking member (28) for movement between first and second positions with respect to said locking member (28); said actuation means being operable by movement of either of said buttons (97 or 99) from said first to said second position for moving said lever lock (84) from said engaged position to said disengaged position,

said stapler firing assembly comprising: a pusher (45) having a longitudinal axis and first and second longitudinally spaced end portions, said pusher (45) being adapted to move longitudinally along the first jaw part (20) with said second end portion sequentially pressing the staples (43) against the anvil (40) to engage and close the staples (43) in tissues between the jaw parts (20, 22) with said first end portion moving between said structural member,

a firing handle body (52) having opposite end portions (53 and 55);

means mounting said handle body (52) on the first end portion of said pusher (45) for movement relative to said pusher (45) between a first position at which one of said end portions projects from the first side (19) of said structural members, and a second position at which one of said end portions projects from the second side (21) of the structural members so that the firing handle body (52) can be positioned to be manually engaged on either side of the structural members (12 or 14) to move the second end of the pusher (45) along the first jaw (20) to eject and close the staples.

Patentansprüche

1. Klammerer-Auslöseaufbau, der für den Einsatz in einem chirurgischen Klammerer eingerichtet ist, der erste und zweite Griffabschnitte mit ersten (19) und zweiten (21) Seiten, und erste und zweite Klemmbackenabschnitte (20, 22), einen Amboß (40), der entlang dem zweiten Klemmbackenabschnitt (22) positioniert ist, und eine Vielzahl von Klammern (43) umfaßt, die entlang dem ersten Klemmbackenabschnitt (20) gegenüber dem Amboß (40) positioniert sind, wobei der Auslöseaufbau folgendes umfaßt:
 - einen Schieber (45) mit einer Längsachse und ersten und zweiten in Längsrichtung beabstandeten Endabschnitten, wobei der

- Schieber dafür eingerichtet ist, sich in Längsrichtung entlang dem ersten Klemmbackenabschnitt (20) zu bewegen, wobei der zweite Endabschnitt nacheinander die Klammern (43) gegen den Amboß (40) drückt, um sie mit den Geweben zwischen den Klemmbackenabschnitten in Eingriff zu bringen und sie zu schließen, wobei der erste Endabschnitt sich zwischen den Griffabschnitten bewegt,
- einen Auslösegriffkörper (52) mit gegenüberliegenden Endabschnitten (53 und 55); gekennzeichnet durch
 - eine Einrichtung, die den Griffkörper (52) am ersten Endabschnitt des Schiebers (45) für eine Bewegung relativ zum Schieber zwischen einer ersten Position, in der einer der Endabschnitte (53 oder 55) von der ersten Seite (19) der Griffabschnitte hervorragt, und einer zweiten Position, in der einer der Endabschnitte (53 oder 55) von der zweiten Seite (21) der Griffabschnitte hervorragt, befestigt, so daß der Auslösegriffkörper (52) positioniert werden kann, um manuell auf jeder Seite der Griffabschnitte eingegriffen zu werden, um das zweite Ende des Schiebers (45) entlang der ersten Klemmbacke zu bewegen, um die Klammern auszuwerfen und zu schließen.
2. Klammerer-Auslöseaufbau nach Anspruch 1, wobei der Auslösegriffkörper erste (53) und zweite (55) Endabschnitte aufweist, und
- die Einrichtung, die den Griffkörper (52) am ersten Endabschnitt des Schiebers befestigt, den Griffkörper (52) für eine gleitende, seitliche Bewegung relativ zum Schieber (45) zwischen der ersten Position, in der der erste Endabschnitt (53) des Griffkörpers (52) von der ersten Seite (19) der Griffabschnitte hervorragt und der zweiten Position, in der der zweite Endabschnitt (55) des Griffkörpers von der zweiten Seite (21) der Griffabschnitte hervorragt, befestigt.
3. Klammerer-Auslöseaufbau nach Anspruch 2, wobei der Griffkörper und die Einrichtung, die den Griffkörper am ersten Endabschnitt des Schiebers befestigt, eine Arretiereinrichtung (62) umfaßt, um den Griffkörper (52) in den ersten und zweiten Positionen lösbar zurückzuhalten.
4. Klammerer-Auslöseaufbau nach Anspruch 3, wobei die Arretiereinrichtung (62) ferner eine Einrichtung umfaßt, um den Griffkörper (52) lösbar an einer Mittelposition in der Mitte zwischen den ersten und zweiten Positionen zu positionieren, in der Teile der ersten (53) und zweiten (55) Endabschnitte des Griffkörpers (52) sowohl über die
- ersten (19) als auch die zweiten (21) Seiten der Griffabschnitte hervorragen.
5. Klammerer-Auslöseaufbau nach Anspruch 1, wobei der Auslösegriffkörper eine Einrichtung (56 oder 57) umfaßt, um zu verhindern, daß die Finger einer Bedienperson seitlich vom Auslösegriffkörper (52) abrutschen.
6. Klammerer-Auslöseaufbau, der für den Einsatz in einem chirurgischen Klammerer eingerichtet ist, der erste und zweite Griffabschnitte mit ersten (19) und zweiten (21) Seiten, und erste und zweite Klemmbackenabschnitte (20, 22), einen Amboß (40), der entlang dem zweiten Klemmbackenabschnitt (22) positioniert ist, und eine Vielzahl von Klammern (43) umfaßt, die entlang dem ersten Klemmbackenabschnitt (20) gegenüber dem Amboß (40) positioniert sind, wobei der Auslöseaufbau folgendes umfaßt:
- einen Schieber (45) mit einer Längsachse und ersten und zweiten in Längsrichtung beabstandeten Endabschnitten, wobei der Schieber (45) dafür eingerichtet ist, sich in Längsrichtung entlang dem ersten Klemmbackenabschnitt (20) zu bewegen, wobei der zweite Endabschnitt nacheinander die Klammern (43) gegen den Amboß (40) drückt, um die Klammern mit den Geweben zwischen den Klemmbackenabschnitten (20, 22) in Eingriff zu bringen und sie zu schließen, wobei der erste Endabschnitt sich zwischen den Griffabschnitten bewegt,
 - einen Auslösegriffkörper (52) mit gegenüberliegenden Endabschnitten (53 und 55); gekennzeichnet durch
 - eine Einrichtung (60, 62) die den Griffkörper am ersten Endabschnitt des Schiebers befestigt, um den Griffkörper auf jeder Seite (19, 21) der Griffabschnitte zu positionieren, so daß der Auslösegriffkörper (52) positioniert werden kann, um manuell von jeder Seite (19, 21) der Griffabschnitte eingreifbar zu sein, um das zweite Ende des Schiebers entlang der ersten Klemmbacke (20) zu bewegen, um die Klammern auszuwerfen und zu schließen.
7. In Kombination weisen ein Klammerer-Auslöseaufbau und ein chirurgischer Klammerer (10) folgendes auf:
- erste (12) und zweite (14) Strukturelemente, die jeweils in einer ersten Richtung langgestreckt sind, wobei das erste Strukturelement (12) einen Griffabschnitt (16) mit ersten (7) und zweiten Enden aufweist, und das zweite Strukturelement (14) einen Basisabschnitt (8) mit ersten und zweiten Enden aufweist, und wobei jedes der ersten und zweiten Strukturelemente

- einen Klemmbackenabschnitt (20, 22) aufweist, der von den ersten Enden hervorragt, wobei die ersten und zweiten Strukturelemente (12, 14) erste (19) und zweite (21) Seiten, einen Amboß (40), der entlang dem zweiten Klemmbackenabschnitt (22) angeordnet ist, und eine Vielzahl von Klammern (43) aufweisen, die entlang dem ersten Klemmbackenabschnitt (20) gegenüber dem Amboß (40) positioniert sind, wobei die Strukturelemente (12, 14) Schwenkeinrichtungen an den zweiten Enden aufweisen, die für ein freies In-Eingriff-Bringen und Außer-Eingriff-Bringen in einer zur ersten Richtung senkrechten Ebene eingerichtet sind, um, wenn sie in Eingriff gebracht worden sind, eine relative Schwenkbewegung der Strukturelemente (12, 14) in der Ebene zwischen einer geschlossenen Position, in der die Klemmbackenabschnitte sich in einer nahe beabstandeten Beziehung befinden, und einer offenen Position, in der die Klemmbackenabschnitte weiter voneinander beabstandet sind als in der geschlossenen Position, zu ermöglichen;
- ein langgestrecktes Sperrelement (28) mit ersten und zweiten Enden, ersten und zweiten Seiten, inneren und äußeren Oberflächen, die sich zwischen den Seiten erstrecken, und einem Drehpunkt, der nahe dem ersten Ende des Sperrelementes (28) benachbart ist, wobei der Drehpunkt des Sperrelementes am zweiten Strukturelement (28) benachbart zum ersten Ende des zweiten Strukturelementes (28) für eine Schwenkbewegung um eine allgemein senkrecht zur ersten Richtung verlaufende Achse zwischen einer Sperrposition, die allgemein mit dem Basisabschnitt (8) des zweiten Strukturelementes (14) ausgerichtet ist, wobei sich die innere Oberfläche benachbart dem zweiten Strukturelement (14) befindet, und einer Löseposition, in der das zweite Ende (6) des Sperrelementes (28) vom zweiten Ende (5) des zweiten Strukturelementes (14) beabstandet ist, befestigt ist, wobei das erste Ende des Sperrelementes (28) und der Griffabschnitt des ersten Strukturelementes (12) benachbart dem ersten Ende des ersten Strukturelementes (12) Oberflächen aufweisen, die, wenn die Schwenkeinrichtungen mit den Strukturelementen in der offenen Position in Eingriff gebracht worden sind, für einen Eingriff während der Bewegung des Sperrelementes von der Löseposition zur Sperrposition eingerichtet sind, um die Strukturelemente (12, 14) zwangsweise zur geschlossenen Position zu bewegen; und
 - eine Einrichtung für einen lösbaren Eingriff zwischen dem langgestreckten Sperrelement (28) und dem zweiten Strukturelement (14), die folgendes umfaßt:
 - das zweite Strukturelement weist einen Schlitz (83) auf, der sich zwischen den inneren und äußeren Oberflächen allgemein benachbart zum zweiten Ende des zweiten Strukturelementes (14) erstreckt;
 - einen Sperrhebel (84) einschließlich einem Hakenabschnitt (86), der dafür eingerichtet ist, durch den Schlitz (83) im zweiten Strukturelement (14) hindurchzutreten, und eine Rückhaltefläche (87) aufweist, die dafür eingerichtet ist, mit einem Abschnitt der inneren Oberfläche in Eingriff zu treten,
 - eine Einrichtung zur Anbringung des Sperrhebels (84) am Sperrelement (28) für eine Bewegung zwischen einer nicht eingerasteten Position, wobei der Hakenabschnitt (86) ausgerichtet ist, um durch den Schlitz (83) hindurchzutreten und eine Bewegung des Sperrelementes (28) zwischen der eingerasteten Position und der Löseposition zu ermöglichen, und einer eingerasteten Position, in der der Hakenabschnitt (86) ausgerichtet ist, um die Rückhaltefläche entlang eines Abschnitts der inneren Oberfläche zu positionieren, um das langgestreckte Sperrelement in der Sperrposition zurückzuhalten,
 - erste und zweite Löseknöpfe (97, 99); und
 - eine Betätigungseinrichtung zur Befestigung der ersten und zweiten Löseknöpfe auf gegenüberliegenden Seiten des Sperrelementes (28) für eine Bewegung zwischen ersten und zweiten Positionen bezüglich dem Sperrelement (28), wobei die Betätigungseinrichtung durch Bewegung jedes der Knöpfe (97 oder 99) von der ersten zur zweiten Position betätigbar ist, um den Sperrhebel (84) von der Eingriffsposition zur Außereingriffsposition zu bewegen, wobei der Klammerer-Auslöseaufbau folgendes umfaßt:
 - einen Schieber (45) mit einer Längsachse und ersten und zweiten in Längsrichtung beabstandeten Endabschnitten, wobei der Schieber (45) dafür eingerichtet ist, sich in Längsrichtung entlang dem ersten Klemmbackenabschnitt (20) zu bewegen, wobei der zweite Endabschnitt nacheinander die Klammern (43) gegen den Amboß (40) drückt, um die Klammern (43) mit den Geweben zwischen den Klemmbackenabschnitten (20, 22) in Eingriff zu bringen und sie zu schließen, wobei der erste Endab-

schnitt sich zwischen den Strukturelementen bewegt;

- einen Auslösegriffkörper (52) mit gegenüberliegenden Endabschnitten (53 und 55); 5
- eine Einrichtung zur Befestigung des Griffkörpers (52) am ersten Endabschnitt des Schiebers (45) für eine Bewegung relativ zum Schieber (45) zwischen einer ersten Position, in der einer der Endabschnitte von der ersten Seite (19) der Strukturelemente hervorragt, und einer zweiten Position, in der einer der Endabschnitte von der zweiten Seite (21) der Strukturelemente hervorragt, so daß der Auslösegriffkörper (52) positioniert werden kann, um manuell auf jeder Seite der Strukturelemente (12 oder 14) eingegriffen werden zu können, um das zweite Ende des Schiebers (45) entlang der erste Klemmbanke (20) zu bewegen, um die Klammern auszuwerfen und zu schließen. 10 15 20

Revendications

1. Dispositif de déclenchement d'agrafeuse utilisable dans une agrafeuse chirurgicale comprenant une première et une deuxième poignées ayant un premier (19) et un deuxième (21) côtés, et une première et une deuxième mâchoires (20 et 22), une enclume (40) placée le long de la deuxième mâchoire (22), et une pluralité d'agrafes (43) placées le long de la première mâchoire (20) en opposition à l'enclume (40), ledit dispositif de déclenchement comprenant : 25 30

un poussoir (45) ayant un axe longitudinal et une première et une deuxième extrémités longitudinalement espacées, ledit poussoir étant prévu pour se déplacer longitudinalement le long de la première mâchoire (20) de sorte que ladite deuxième extrémité presse successivement les agrafes (43) contre l'enclume (40) de manière à engager et fermer les agrafes (43) dans les tissus placés entre les mâchoires, tandis que ladite première extrémité se déplace entre lesdites poignées ; et 35 40

une barrette de déclenchement (52) ayant des parties d'extrémité opposées (53 et 55) ; caractérisé en ce qu'il comprend : 45

des moyens de montage de ladite barrette (52) sur la première extrémité dudit poussoir (45) pour un mouvement par rapport audit poussoir entre une première position, dans laquelle une desdites parties d'extrémité (53 ou 55) fait saillie en dehors du premier côté (19) desdites poignées, et une deuxième position dans laquelle une des dites parties d'extrémité (53 ou 55) fait saillie hors du deuxième côté (21) desdites poignées, de sorte qu'on peut posi- 50 55

tionner la barrette de déclenchement (52) pour permettre sa commande manuelle d'un côté ou de l'autre des poignées afin de déplacer la deuxième extrémité du poussoir (45) le long de la première mâchoire pour éjecter et fermer les agrafes.

2. Dispositif de déclenchement d'agrafeuse suivant la revendication 1, dans lequel ladite barrette de déclenchement présente une première (53) et une deuxième (55) parties d'extrémité, et lesdits moyens de montage de la dite barrette (52) sur la première extrémité dudit poussoir supportent ladite barrette (52) pour un mouvement coulissant latéral par rapport audit poussoir (45) entre la dite première position, dans laquelle ladite première partie d'extrémité (53) de ladite barrette (52) fait saillie par rapport au premier côté (19) desdites poignées, et ladite deuxième position dans laquelle ladite deuxième partie d'extrémité (55) de ladite barrette fait saillie par rapport au deuxième côté (21) desdites poignées.
3. Dispositif de déclenchement d'agrafeuse suivant la revendication 2, dans lequel ladite barrette et lesdits moyens de montage de ladite barrette sur la première extrémité dudit poussoir comprennent des moyens de positionnement (62) pour retenir de façon libérable ladite barrette (52) dans lesdites première et deuxième positions.
4. Dispositif de déclenchement d'agrafeuse suivant la revendication 3, dans lequel lesdits moyens de positionnement (62) comprennent en outre des moyens pour positionner de façon libérable ladite barrette (52) à une position intermédiaire, à mi-distance entre lesdites première et deuxième positions, à laquelle des parties desdites première (53) et deuxième (55) extrémités de la dite barrette (52) font saillie en dehors à la fois des premier (19) et deuxième (21) côtés desdites poignées.
5. Dispositif de déclenchement d'agrafeuse suivant la revendication 1, dans lequel ladite barrette de déclenchement comprend des moyens (56 ou 57) pour empêcher les doigts d'un utilisateur de glisser latéralement hors de la barrette de déclenchement (52).
6. Dispositif de déclenchement d'agrafeuse prévu pour l'utilisation dans une agrafeuse chirurgicale comprenant une première et une deuxième poignées ayant un premier (19) et un deuxième (21) côtés, et une première et une deuxième mâchoires (20,22), une enclume (40) placée le long de la deuxième mâchoire (22), et une pluralité d'agrafes (43) placées le long de la première mâchoire (20) en opposition à l'enclume (40), ledit dispositif de déclenchement comprenant : 50 55

- un poussoir (45) ayant un axe longitudinal et une première et une deuxième extrémités longitudinalement espacées, ledit poussoir (45) pouvant se déplacer longitudinalement le long de la première mâchoire (20) de sorte que ladite deuxième extrémité presse successivement les agrafes (43) contre l'enclume (40) pour engager et fermer les agrafes dans les tissus placés entre les mâchoires (20,22), tandis que ladite première extrémité se déplace entre lesdites poignées ; et
- une barrette de déclenchement (52) ayant des extrémités opposées (53 et 55) ; caractérisé par des moyens (60,62) de montage de ladite barrette sur la première extrémité dudit poussoir pour positionner ladite barrette sur un côté ou l'autre (19,21) des dites poignées, de sorte qu'on peut positionner la barrette de déclenchement (52) pour l'actionner manuellement d'un côté ou de l'autre (19,21) des poignées afin de déplacer la deuxième extrémité du poussoir le long de la première mâchoire (20) pour éjecter et fermer les agrafes.
7. En combinaison, un dispositif de déclenchement d'agrafeuse et une agrafeuse chirurgicale (10) comprenant :
- un premier (12) et un deuxième (14) éléments structurels allongés chacun dans une première direction, le premier élément structurel (12) comportant une poignée (16) qui présente une première (7) et une deuxième extrémités et le deuxième élément structurel (14) comportant une partie de base (8) qui présente une première et une deuxième extrémités, et chacun des premier et deuxième éléments structurels comportant une mâchoire (20,22) qui s'étend à partir desdites premières extrémités, lesdits premier et deuxième éléments structurels (12,14) ayant un premier (19) et un deuxième (21) côté, une enclume (40) placée le long de la deuxième mâchoire (22), et une pluralité d'agrafes (43) placées le long de la première mâchoire (20) en opposition à l'enclume (40), lesdits éléments structurels (12,14) comportant, auxdites deuxième extrémités, des moyens de pivotement prévus pour s'accoupler et se désaccoupler librement dans un plan perpendiculaire à ladite première direction afin de permettre, lorsqu'ils sont accouplés, un mouvement pivotant relatif desdits éléments structurels (12,14) dans ledit plan entre une position fermée, dans laquelle lesdites mâchoires sont proches l'une de l'autre, et une position ouverte dans laquelle lesdites mâchoires sont plus éloignées l'une de l'autre que dans ladite position fermée ;

un élément de verrouillage allongé (28) ayant une première et une deuxième extrémités, un premier et un deuxième côtés, des surfaces intérieure et extérieure s'étendant entre lesdits côtés, et un point de pivotement proche de la première extrémité de l'élément de verrouillage (28), le point de pivotement dudit élément de verrouillage étant monté sur ledit deuxième élément structurel (28) près de la première extrémité dudit deuxième élément structurel (28) pour un mouvement pivotant autour d'un axe sensiblement perpendiculaire à ladite première direction entre une position de blocage, sensiblement en alignement avec la partie de base (8) dudit deuxième élément structurel (14) de sorte que ladite surface intérieure est adjacente audit deuxième élément structurel (14), et une position de libération dans laquelle la deuxième extrémité (6) dudit élément de verrouillage (28) est espacée de la deuxième extrémité (5) dudit deuxième élément structurel (14), ladite première extrémité dudit élément de verrouillage (28) et ladite poignée dudit premier élément structurel (12) près de la première extrémité dudit premier élément structurel (12) ayant des surfaces prévues, lorsque lesdits moyens de pivotement sont en prise et que lesdits éléments structurels sont dans ladite position ouverte, pour venir en contact mutuel pendant le mouvement dudit élément de verrouillage de la dite position de libération à ladite position de blocage afin d'amener de force lesdits éléments structurels (12,14) à ladite position fermée ; et des moyens d'accouplement libérable entre l'élément de verrouillage allongé (28) et le deuxième élément structurel (14) comprenant :


- une fente (83) dans ledit deuxième élément structurel, ladite fente s'étendant entre lesdites surfaces intérieure et extérieure sensiblement près de la deuxième extrémité dudit deuxième élément structurel (14),
- un verrou de levier (84) comportant un crochet (86) qui peut passer dans ladite fente (83) dudit deuxième élément structurel (14) et qui présente une surface de retenue (87) prévue pour venir en prise avec une partie de ladite surface intérieure,
- des moyens de montage du verrou de levier (84) sur ledit élément de verrouillage (28) pour un mouvement entre une position déverrouillée dans laquelle ledit crochet (86) est éloigné de façon à passer à travers ladite fente (83) et à permettre un mouvement de l'élément de verrouillage (28) entre lesdites positions de blocage et de libération, et une position verrouillée




dans laquelle ledit crochet (86) est aligné de manière à positionner la surface de retenue le long d'une partie de ladite surface intérieure afin de retenir l'élément de verrouillage allongé dans la position de blocage ; 5





- un premier et un deuxième boutons de libération (97 et 99); et
- des moyens de commande supportant lesdits premier et deuxième boutons de libération sur des côtés opposés dudit élément de verrouillage (28) pour un mouvement entre une première et une deuxième positions par rapport audit élément de verrouillage (28), lesdits moyens de commande étant manoeuvrables par un mouvement de l'un ou l'autre desdits boutons (97 ou 99) de ladite première position à ladite deuxième position afin d'amener ledit verrou de levier (84) de ladite position en prise à ladite position dégagée ; 10 15 20

ledit dispositif de déclenchement d'agrafeuse comprenant :

- un poussoir (45) ayant un axe longitudinal et une première et une deuxième extrémités longitudinalement espacées, ledit poussoir (45) étant prévu pour se déplacer longitudinalement le long de la première mâchoire (20) de sorte que ladite deuxième extrémité presse successivement les agrafes (43) contre l'enclume (40) pour engager et fermer les agrafes (43) dans des tissus placés entre les mâchoires (20,22) tandis que ladite première extrémité se déplace entre lesdits éléments structurels, 25 30 35
- une barrette de déclenchement (52) ayant des extrémités opposées (53 et 55) ; et 40
- des moyens de montage de ladite barrette (52) sur la première extrémité dudit poussoir (45) pour un mouvement par rapport audit poussoir (45) entre une première position, dans laquelle une desdites extrémités fait saillie par rapport au premier côté (19) desdits éléments structurels, et une deuxième position dans laquelle une desdites extrémités fait saillie par rapport au deuxième côté (21) des éléments structurels, de sorte qu'on peut positionner la barrette de déclenchement (52) pour sa commande manuelle d'un côté ou de l'autre des éléments structurels (12 ou 14) afin de déplacer la deuxième extrémité du poussoir (45) le long de la première mâchoire (20) pour éjecter et fermer les agrafes. 45 50 55

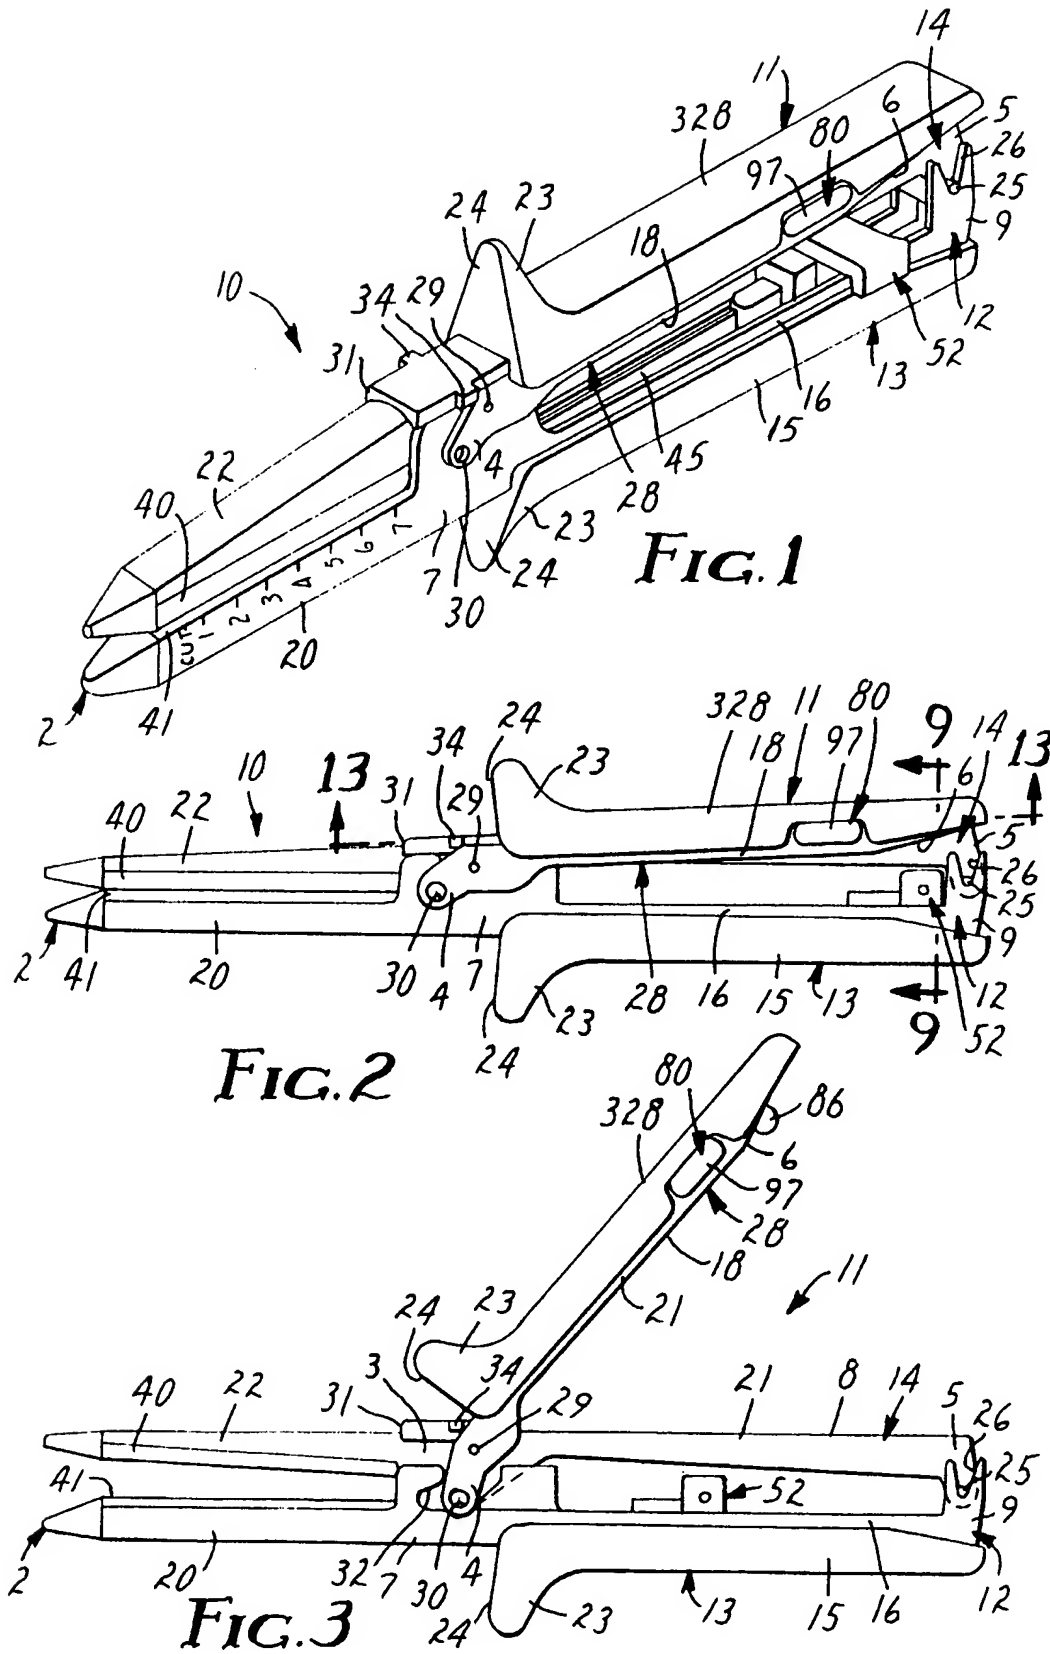

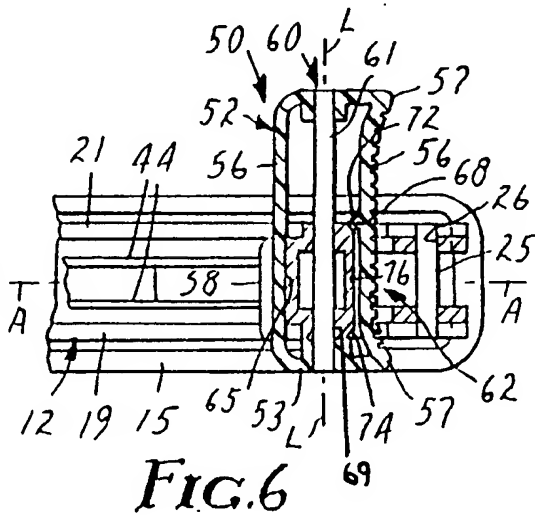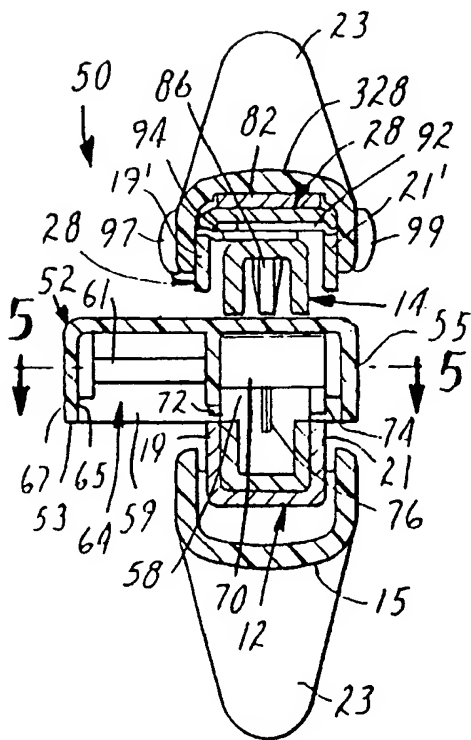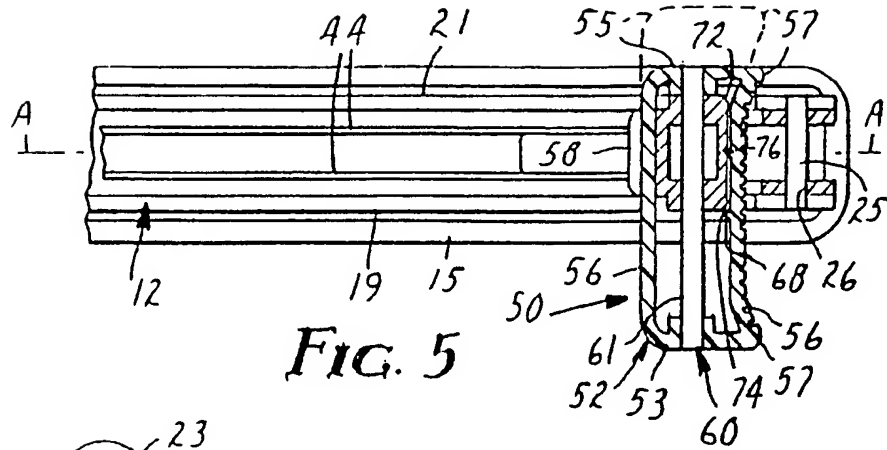

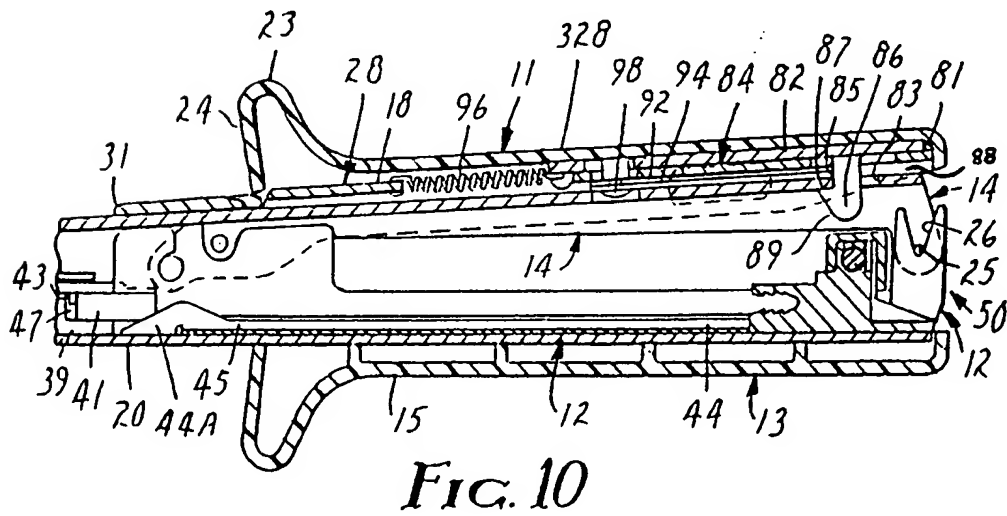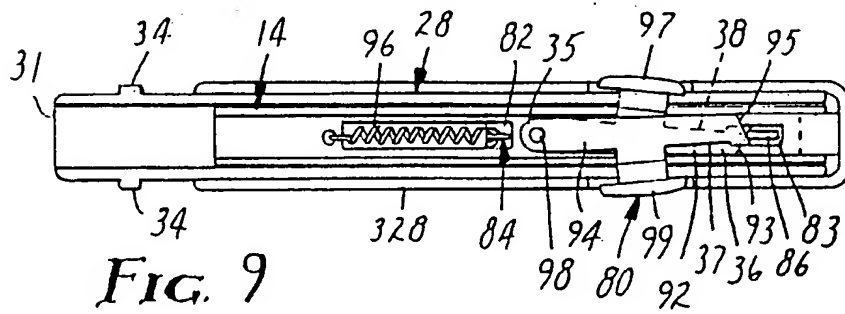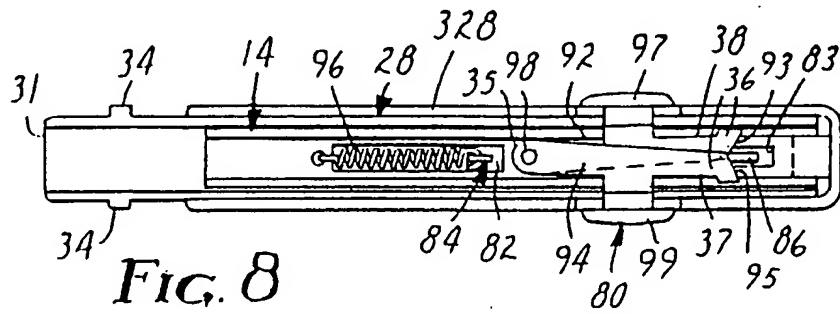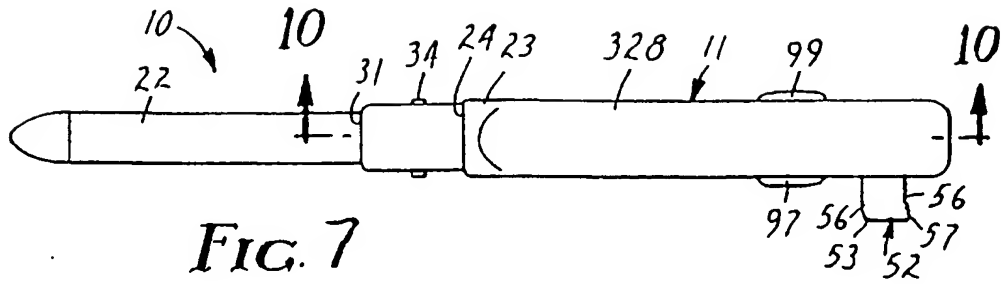

THIS PAGE BLANK (USPTO)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)